

10/017,103 #3

AB

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04L 25/03, 25/02		A1	(11) International Publication Number: WO 00/13383
			(43) International Publication Date: 9 March 2000 (09.03.00)
(21) International Application Number: PCT/US99/17808 (22) International Filing Date: 3 August 1999 (03.08.99) (30) Priority Data: 09/143,821 31 August 1998 (31.08.98) US (71) Applicant: ERICSSON, INC. [US/US]; 7001 Development Drive, P.O. Box 23969, Research Triangle Park, NC 27709 (US). (72) Inventors: HAFEEZ, Abdulrauf; 1929 Plymouth Road, #3005, Ann Arbor, MI 48105 (US). MOLNAR, Karl, J.; 110 Flying Leaf Court, Cary, NC 27513 (US). BOTTOMLEY, Gregory, E.; 100 Merlot Court, Cary, NC 27511 (US). (74) Agents: BIGEL, Mitchell, S. et al.; Myers, Bigel, Sibley, & Sajovec, P.A., P.O. Box 37428, Raleigh, NC 27627 (US).		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: METHODS AND SYSTEM FOR REDUCING CO-CHANNEL INTERFERENCE USING MULTIPLE SAMPLING TIMINGS FOR A RECEIVED SIGNAL

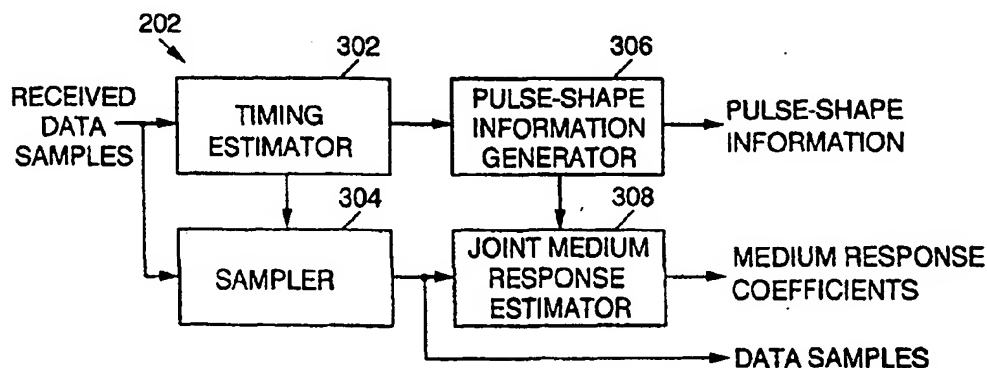

(57) Abstract

A plurality of timings are estimated for a received signal wherein the plurality of timings correspond to a plurality of transmitted signals. The received signal is then sampled in accordance with the plurality of timings, to produce a plurality of sample streams from the received signal. Channel estimates are produced for the plurality of transmitted signals and metrics are computed using the sample streams and the channel estimates. Information symbols corresponding to the transmitted signals are detected by using the metrics. Accordingly, by using multiple timings for a received signal, rather than using a common timing, the number of channel taps that are used may be reduced and the accuracy of symbol detection may be increased. The channel estimates may be produced by generating pulse-shape information and producing channel estimates for the multiple transmitted signals using the received signal and the pulse-shape information. Channel estimates may be produced that correspond to a plurality of symbol sequence hypotheses. Channel estimates may be updated using an error signal.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Description

5

10

15

20

25

30

35

40

45

50

55

METHODS AND SYSTEM FOR REDUCING CO-CHANNEL INTERFERENCE USING MULTIPLE SAMPLING
TIMINGS FOR A RECEIVED SIGNAL

Field of the Invention

The present invention relates to digital communications, and more particularly to reception of co-channel signals in digital communications.

Background of the Invention

Bandwidth is a valuable resource in wired and wireless communication systems. Frequency may be reused in a wireless network in order to reduce cost. A signal occupying the same bandwidth as a desired signal, referred to herein as a co-channel signal, may cause interference and may severely limit the performance of a conventional single-user receiver. Moreover, a transmitted signal may travel along several paths to arrive at the receiver in a wireless environment. This multipath propagation may also give rise to signal fading and inter-symbol interference.

The effects of Co-Channel Interference (CCI) and Inter-Symbol Interference (ISI) can be reduced by using joint equalization/interference cancellation at a receiver. Among the various approaches, which include linear filtering and decision feedback, Joint Maximum Likelihood Sequence Estimation (JMLSE) of co-channel signals may provide superior performance. See for example, Ranta et al, "Co-Channel Interference Cancelling Receiver for TDMA Mobile Systems", IEEE ICC Proceedings, Feb. 1995, pp. 17-21. However, Ranta's approach may only be applicable to stationary channels (stationary over a data burst). Unfortunately, radio signals in mobile communication systems generally undergo Doppler shift caused by vehicular motion. When data bursts are long, this generally results in time-varying signal fading. Yoshino et al. propose joint adaptive channel estimation and demodulation in Yoshino et al., "Interference Canceling Equalizer (ICE) for Mobile Radio Communication", IEEE Trans. Vehicular Tech., Vol. 46, No. 4, Nov. 1997, pp. 849-861.

The receivers proposed in the above-mentioned publications obtain co-channel impulse response estimates jointly with the aid of training sequences of synchronized

5 co-channel signals. In current Time Division Multiple Access (TDMA) cellular
radiotelephone systems like GSM and D-AMPS, co-channel signals are not
10 synchronized in either link. Thus, joint training may not be readily used for channel
estimation. However, it is possible to exploit the training sequences of individual
5 signals. One such technique which utilizes the training sequences of all signals is
described in Wales, "Technique for Cochannel Interference Suppression in TDMA
Mobile Radio Systems", IEEE Proc. Comm., Vol. 142, No. 2, April 1995. This
15 technique is also generally applicable to stationary channels.

Giridhar et al. propose adaptive joint MLSE and MAPSD algorithms which
10 can estimate channel responses blindly without requiring any training in Giridhar et
al., "Nonlinear Techniques for the Joint Estimation of Cochannel Signals", IEEE
20 Trans. Comm., Vol. 45, No. 4, April 1997, pp. 473-483. They use a technique called
Per-Survivor Processing (PSP) which involves parallel channel state feedback in the
recursion of an MLSE processor. PSP can provide an effective alternative to
25 conventional adaptive algorithms that employ a single channel estimator. However,
the acquisition performance of PSP-based MLSE receivers may have limitations as
described in Chugg, "Acquisition Performance of Blind Sequence Detectors Using
30 Per-Survivor Processing", IEEE VTC Proceedings, Vol. 2, May 1997, pp. 539-543.

In a TDMA system, each co-channel signal may be subject to an overall
20 channel impulse response which comprises a transmit pulse-shaping filter, a
dispersive medium and a receive filter matched to the transmit pulse-shaping filter.
35 The transmit and receive filter responses are known *a priori* and can thus be used to
constrain the overall channel impulse responses. In the case of asynchronous co-
channel signals, ringing arising from sampling offsets may increase the number of
25 channel taps to be modeled. Estimation error generally rises as the number of taps
being estimated increases.

Summary of the Invention

45 It is therefore an object of the present invention to provide improved receivers
30 and receiving methods that can reduce and preferably cancel co-channel interference.

It is another object of the present invention to provide receivers and receiving
50 methods that can reduce co-channel interference without requiring an undue increase
in the number of channel taps to be modeled.

5 These and other objects are provided, according to the present invention by
estimating multiple timings for a received signal and sampling the received signal in
10 accordance with the multiple timings, to produce multiple sample streams. The
multiple sample streams are then used to detect information symbols. By generating
5 and using the multiple timings and samplings of the received signals, efficient
detection of information symbols may be obtained, without requiring undue increase
15 in the number of taps that are being estimated. Reduction and preferably cancellation
of co-channel interference can thereby be obtained.

 More specifically, according to the present invention, a plurality of timings are
10 estimated for a received signal wherein the plurality of timings correspond to a
plurality of transmitted signals. The received signal is then sampled in accordance
20 with the plurality of timings, to produce a plurality of sample streams from the
received signal. Channel estimates are produced for the plurality of transmitted
signals, and metrics are computed using the sample streams and the channel estimates.
25 Information symbols corresponding to the transmitted signals are detected by using
the metrics. Accordingly, by using multiple timings for a received signal, rather than
using a common timing, the number of channel taps that are used may be reduced and
30 the accuracy of symbol detection may be increased.

 The multiple timings may be estimated for the received signal by correlating
20 the received signal to at least one symbol sequence. Alternatively, a timing may be
hypothesized and metrics may be computed that are associated with the hypothesized
35 timing. The sampling may obtain a single sample per symbol period of the received
signal in accordance with the multiple timings. Alternatively, the sampling may
obtain multiple samples per symbol period of the received signal in accordance with
25 the multiple timings.

 The channel estimates may be produced by generating pulse-shape
information and producing channel estimates for the multiple transmitted signals
using the received signal and the pulse-shape information. Alternatively, channel
45 estimates may be produced that correspond to a plurality of symbol sequence
hypotheses. Channel estimates may be updated using an error signal.

 The metrics may be computed by filtering the sample streams with the channel
estimates to provide multiple filter outputs. One filter or multiple filters may be used.
50 The filter outputs may then be used to compute the metrics. Alternatively, the metrics

5 may be computed by estimating received values using the channel estimates and the hypothesized symbols, and computing the metrics using the estimated received values.

10 Finally, the information symbols may be detected by storing path information that is associated with a plurality of paths, and extending the paths by hypothesizing symbol values and computing metrics. Paths may be discarded based on the metrics or based on the metrics and a state space.

15 According to another aspect of the invention, a receiver can reduce the number of channel taps to be modeled by using pulse-shape information for the received signal. When the pulse shape information is used, a common timing and sampling may be used. However, as described above, the pulse-shape information may be used with multiple timings and samplings as well. Pulse shaping information may be obtained from the amount of ringing that is included in a received pulse. By using the pulse shape information, channel taps may be reduced.

20 More specifically, pulse-shape information is generated for a received signal. Channel estimates are produced for a plurality of transmitted signals using the received signal and the pulse-shape information. Metrics are computed using the received signal and the channel estimates, and information symbols are detected corresponding to the plurality of transmitted signals using the metrics. The channel estimates may be produced, the metrics may be computed and the information symbols may be detected, as was described in detail above.

25 According to yet another aspect of the present invention, "semi-blind" acquisition of signals may be used when the information set corresponding to one signal is known, for example because the signal includes a synchronization word. Accordingly, timings may be estimated and samples may be obtained, as described above. However, the channel estimates may be initialized for the plurality of transmitted channels and the metrics may be initialized for the sample streams based on the known information symbols. Updated metrics may then be computed using the sample streams, the initialized channel estimates and the initialized metrics, and information symbols may be detected corresponding to at least one of the transmitted signals, using the updated metrics. The channel estimates may then be updated using the updated metrics. Estimating, initializing, computing metrics and detecting information symbols may be performed as described above.

Accordingly, receivers and receiving methods may be provided that can reduce and preferably cancel co-channel interference using multiple timings and/or pulse-shape information and/or known information symbol information. The number of channel taps to model may be reduced, to thereby allow reduced estimation errors.

Brief Description of the Drawings

Figure 1 is a block diagram of a digital wireless communication system according to the invention;

Figure 2 illustrates an embodiment of receivers and receiving methods according to the present invention;

Figure 3 illustrates an embodiment of acquisition according to the present invention;

Figure 4 illustrates an embodiment of sampling according to the present invention;

Figure 5 illustrates a flowchart of joint medium response estimating according to the present invention;

Figure 6 illustrates an embodiment of demodulation according to the present invention;

Figure 7 illustrates an alternative embodiment of sampling according to the present invention; and

Figure 8 illustrates the use of pulse-shape information according to the invention.

Detailed Description of Preferred Embodiments

The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

The present invention will be described in the context of wireless communication. However, the invention is applicable to any communication system

5 or storage device. Figure 1 illustrates a digital wireless communication system 100 in which the present invention may be utilized. Digital information symbols $a_1(n)$ are passed to a transmitter 102a, which converts the symbol stream into a radio waveform for transmission using antenna 104a. A second transmitter 102b converts a second
10 independent symbol stream $a_2(n)$ into a radio waveform for transmission using antenna 104b. The two radio signals occupy the same frequency band, though with a possible small frequency offset, and are received by antenna 106. It will be understood that although a single antenna 106 is illustrated, multiple antennas such as diversity antennas may be used. The received signal is processed by a radio
15 frequency (RF) processor 108, which pre-processes the signal for example by filtering, amplifying, mixing and sampling the signal appropriately, giving rise to a sequence of received samples. Preferably, the filtering is matched to the transmit filter. The data samples are processed in receiver 110 to produce estimated digital information sequences $\hat{a}_1(n)$ and $\hat{a}_2(n)$ corresponding to transmitted sequences $a_1(n)$
20 and $a_2(n)$ respectively.

Figure 2 illustrates receiving systems and methods 110 in accordance with the present invention. The receiving systems and methods 110 perform two operations: acquisition and demodulation. Acquisition 202 jointly estimates certain channel parameters of co-channel signals and downsamples received data samples
30 appropriately depending on the implementation. Demodulation 204 jointly estimates transmitted information sequences using the channel parameters and data samples provided by acquisition 202. It will be understood that acquisition 202 and demodulation 204 may be embodied using one or more analog or digital integrated circuits, integrated circuit microprocessors that run a stored program, Application-Specific Integrated Circuits (ASIC), or any other combination of hardware and/or
40 software.

An exemplary embodiment of acquisition 202 according to the present invention is illustrated in Figure 3. As shown, acquisition 202 includes a timing estimator 302, a sampler 304, a pulse-shape information generator 306 and a joint
45 medium response estimator 308. The received data samples are input to timing estimator 302 and sampler 304. An output of the timing estimator is coupled to pulse-shape information generator 306 and another output is coupled to sampler 304. An
50 output of sampler 304 and an output of pulse-shape information generator 306 are

coupled to joint medium response estimator 308. The joint medium response estimator produces estimates of the co-channel medium responses, referred to as medium response coefficients.

Timing estimator 302 determines the timing of all co-channel signals. One approach is to correlate the received data samples with respective training sequences. Sampler 304 down-samples the received data signal to K samples per symbol (rate K/T) according to the timing of the desired signal as shown in Figure 4, where T is the symbol period and K is typically 1 or 2. While the present invention is explained in terms of 1 sample per symbol, it will be apparent to one of ordinary skill in the art that the present invention can be used with multiple samples per symbol. Pulse-shape information generator 306 generates the sampled autocorrelation function ρ of the pulse-shaping filters, i.e.

$$\rho_{k,j} = f^*(-t) \otimes f(t) \Big|_{t=jT-\tau_k} \quad (1)$$

where ' \otimes ' denotes the convolution operation and ' $|$ ' denotes the sampling operation. In Equation (1), $f(t)$ is the transmit or receive pulse-shaping filter (same for all signals) and τ_k is the delay (modulo T) of the kth signal as compared to the first signal. The number of samples (index j) generated is equal to the number of taps used to model each signal. Since $f(t)$ is fixed, the function ρ can be pre-computed and stored in memory for all possible delay values. The proper sample values can be read from generator memory depending on the timing estimates provided by timing estimator 302.

Figure 8 graphically illustrates the use of pulse-shape information by pulse-shape information generator 306. More specifically, Figure 8 graphically illustrates a pulse in which there is one ray or image of the signal. Because of transmit and receive filters, the image of each symbol "rings" as illustrated in Figure 8. If sampling occurs as shown by the arrows, then it will appear that there are four images or echoes of the symbol when, in reality, there is only one. By exploiting knowledge of the ringing pattern (pulse-shape autocorrelation), the receiver can recognize that there is only one image and only estimate one channel coefficient, not four.

Finally, joint medium response estimator 308 jointly estimates the medium responses of the co-channel signals. Let $\{r_n\}$ be the sequence of data samples at the

output of the sampler 304. Assume Nyquist pulse-shaping and flat Rayleigh fading for both signals. Then, the data sequence can be modeled as

$$r_n = \underline{g}_n^H \Phi \underline{\alpha}_n + w_n \quad (2)$$

where $\underline{g}_n = [g_1(n), g_2(n)]^H$ is the vector of medium responses, w_n is a sample of an additive white Gaussian noise process with zero mean and finite variance, $\underline{\alpha} = [a_1(n), a_2(n+1), a_2(n), a_2(n-1)]^T$ and Φ is the pulse autocorrelation matrix, given by

$$\Phi = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \rho_{2,-1} & \rho_{2,0} & \rho_{2,1} \end{bmatrix} \quad (3)$$

where it is assumed that $\rho_{2,j}$ has zero (or negligible) energy for $j > 1$ and $j < -1$. Thus, the sampled autocorrelation function for the second signal (which is not sampled at the peak of its autocorrelation function) can be completely modeled using three values.

If medium responses \underline{g}_n are known *a priori*, the joint maximum likelihood sequence based on the model of Equation (2) can be determined as the sequence

$\{\hat{a}_1(n), \hat{a}_2(n)\}_{n=1}^N$ that minimizes the metric:

$$J_N = \sum_{n=1}^N \left\| r_n - \underline{g}_n^H \Phi \hat{\underline{\alpha}}_n \right\|^2 \quad (4)$$

The metric can be computed recursively by using the Viterbi algorithm, for example as described in van Etten, *Maximum-Likelihood Receiver for Multiple Channel Transmission Systems*, IEEE Trans. Comm., Feb. 1976, pp. 276-283, and the references therein, as follows:

$$J_n = J_{n-1} + \left\| e(\sigma_n | \sigma_{n-1}) \right\|^2 \quad (5)$$

where $\sigma_n = \{\hat{a}_2(n), \hat{a}_2(n-1)\}$ represents the state at time n and $e(\sigma_n | \sigma_{n-1})$ represents branch metrics (or error), given by:

$$e(\sigma_n | \sigma_{n-1}) = r_n - \underline{g}_n^H \Phi \hat{\underline{\alpha}}_n \quad (6)$$

If medium responses are unknown *a priori*, branch metrics can be computed as

$$e(\sigma_n | \sigma_{n-1}) = r_n - \hat{\underline{g}}_n^H(\sigma_{n-1}) \Phi \hat{\underline{\alpha}}_n \quad (7)$$

where $\hat{g}_n(\sigma_{n-1})$ are medium response estimates conditioned on the survivor sequence associate with state (σ_{n-1}) . With Least Mean Square (LMS) channel identification, medium response update is performed according to

$$\hat{g}_{n+1}(\sigma_n) = \hat{g}_n(\sigma_{n-1}) + \mu \Phi \hat{\alpha}_n e^*(\sigma_n | \sigma_{n-1}) \quad (8)$$

where μ is a constant called step size. Note that other forms of channel identification including Recursive Least Squares (RLS) or Kalman LMS (KLMS) can also be used for channel update. This describes joint channel tracking for multiple user signals using pulse-shape side information. Single user channel tracking with side information is disclosed in pending U.S. Application Serial No. 09/007,936, filed January 16, 1998 to Molnar et al., entitled "*Methods and Apparatus for Channel Tracking*", the disclosure of which is incorporated herein by reference.

The aspect of keeping channel estimates associated with the states of an MLSE processor is referred to as Per-Survivor Processing (PSP). See for example Raheli, et al., "*Per-Survivor Processing: A General Approach to MLSE in Uncertain Environments*" IEEE Trans. Comm., Vol. 43, No. 2/3/4, Feb./March/April 1995, pp. 354-364. PSP-based MLSE may have some limitations when used for blind acquisition. It was demonstrated by Chugg in "*Acquisition Performance of Blind Sequence Detectors Using Per-Survivor Processing*", IEEE VTC Proceedings, Vol. 2, May 1997, pp. 539-543, that the probability of acquisition of PSP-based MLSE receivers can be enhanced significantly by resorting to an extended data sequence search. A cause of mis-acquisitions in the single channel case is the existence of what the author refers to as indistinguishable or equivalent sequences. The class includes sequences such as the inverted and shifted versions of the transmitted data sequence. In order to improve the performance of single user acquisition, Chugg proposed to minimize the number of sequences eliminated during the early stages of convergence in a generalized PSP algorithm.

Generalized PSP is the concept of per-path parallel feedback extended to an arbitrary tree search algorithm. Two main approaches in the class of breadth-first type tree search algorithms are the multiple state PSP technique and the multiple survivor PSP technique. The first approach increases the number of survivor paths maintained by constructing a trellis based on a memory length L' in place of L such that $L' > L$. The latter approach, on the other hand, allows an arbitrary number of survivor paths P

5 to be maintained (where $P > M^L$, M is size of the symbol alphabet). Like the M -algorithm, survivor paths in a multiple survivor PSP algorithm are extended to PM paths of which P are kept based on the accumulated metric.

10 In the present invention, generalized PSP techniques are extended for use with
5 multiple user signals. The blind acquisition of multiple co-channels may be more difficult than single channel acquisition. In a PSP based joint MLSE receiver, mis-acquisitions may be caused by transmitted co-channel sequences that happen to be
15 highly correlated over a large enough window of overlapping symbol positions. Thus, when co-channel signals are not synchronized, generalized PSP may be used for joint
10 channel acquisition.

20 Joint medium response estimator 308 according to the present invention estimates co-channel medium responses jointly using a generalized PSP algorithm. A preferred embodiment of joint medium response estimator 308 is described by the flowchart in Figure 5. It will be understood that each block of the flowchart
25 illustrations, and combinations of blocks in the flowchart illustrations, can be implemented by computer program instructions. These computer program instructions may be provided to a processor or other programmable data processing
30 apparatus to produce a machine, such that the instructions which execute on the processor or other programmable data processing apparatus create means for
20 implementing the functions specified in the flowchart block or blocks. These computer program instructions may also be stored in a computer-readable memory
35 that can direct a processor or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable memory produce an article of manufacture including instruction means
25 which implement the functions specified in the flowchart block or blocks.

40 Accordingly, blocks of the flowchart illustrations support combinations of means for performing the specified functions, combinations of steps for performing the specified functions and program instruction means for performing the specified
45 functions. It will also be understood that each block of the flowchart illustrations, and
30 combinations of blocks in the flowchart illustrations, can be implemented by special purpose hardware-based computer systems which perform the specified functions or steps such as is described in Figure 5, or by combinations of special purpose hardware
50 and computer instructions.

5 Referring to Figure 5, initialize Block 504 initializes the medium impulse
responses (MIRs) for all co-channel signals. For example, they can be initialized to
their least squares estimates found using the corresponding training sequences
10 individually. These estimates are then refined by carrying out a semi-blind multiple
5 survivor search over the data samples corresponding to the training sequence of the
desired signal. The extend paths Block 506 extends survivor paths which represent
hypotheses for the interfering symbols. The new accumulated metrics are computed
15 for the extended paths based on the known symbols of the desired signal, the
hypothesized symbols of the interfering signal and the predicted medium response
coefficients. If the end of the acquisition field has not yet been reached, as indicated
10 by the end Block 508 and the number of paths extended exceeds the number of paths
desired as indicated by the $\# \text{ Paths} > P$ Block 510, paths are pruned by Block 512
20 based on the accumulated metric using Equation (5). Pruning is not performed if the
number of paths extended is less than or equal to that desired. MIR coefficients are
25 updated for each survivor path using the LMS or the RLS approach in Block 514 and
operations return to extending paths in Block 506. When the end of the acquisition
period is reached, Block 516 outputs the updated MIR coefficients corresponding to
30 the path with the best accumulated metric.

Once the co-channel signals have been acquired in acquisition 202 of Figure 2,
20 the signals are jointly demodulated adaptively in demodulation 204. Figure 6 shows
an exemplary embodiment of demodulation 204 according to the present invention. It
35 includes a joint sequence detector 602 and an adaptive channel estimator 604. The
sequence of data samples obtained at the output of sampler 304 in acquisition is
provided to joint sequence detector 602 and adaptive channel estimator 604. Pulse-
40 shaping information and medium response coefficients obtained in acquisition are
coupled to two inputs of adaptive channel estimator 604. Joint sequence detector 602
provides hypothesized symbol values to adaptive channel estimator 604, which
provides the sequence detector with updated channel estimates. Joint sequence
45 detector 602 outputs estimates of the sequences transmitted.

30 Joint sequence detector 602 finds the joint maximum likelihood estimate of
co-channel sequences based on the discrete-time symbol-spaced model of Equation
(2). This may be done recursively using Equations (5) and (7). Medium response
50 estimates to compute branch metrics in Equation (7) are provided by adaptive channel

estimator 604, which updates MIR coefficients recursively using Equation (8), conditioned on the state (or the survivor path) of joint sequence detector 602. MIR coefficients are initialized to the estimates obtained by joint medium response estimator 308.

The receiver described in the above exemplary embodiment makes use of symbol-spaced samples of the received signal (obtained at the timing of the desired signal) for channel acquisition and demodulation. An alternative receiver constructed according to the present invention utilizes samples obtained at the timing of all signals. The sampler in this alternative embodiment is shown in Figure 7 for the case of two co-channel signals.

Similar to the model for data samples obtained at desired signal timing per Equation (2), the sequence of data samples obtained at the interfering signal's timing (in the case of flat faded signals) can be modeled as

$$r'_n = \underline{g}'_n \Phi' \underline{\alpha}'_n + w'_n \quad (9)$$

where w'_n is a sample of an additive white Gaussian noise process with zero mean and finite variance, $\underline{\alpha}'_n = (a_1(n+1), a_1(n), a_1(n-1), a_2(n))'$ and Φ' is given by

$$\Phi' = \begin{bmatrix} \rho_{2,1}^* & \rho_{2,0}^* & \rho_{2,-1}^* & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \quad (10)$$

where it is assumed that the sampled autocorrelation function for the first signal is also modeled completely using three values. Noise processes $\{w_n\}$ and $\{w'_n\}$ are

correlated with sample covariance $E\{w_n w'_n\} = \rho_{2,1}$.

The information contained in the two sequences of data samples can be extracted optimally, for example by extending to adaptive multi-user joint estimation the Ungerboeck formulation for maximum likelihood sequence estimation as described in the paper G. Ungerboeck, "Adaptive Maximum Likelihood Receiver for Carrier Modulated Data Transmission Systems", IEEE Trans. Comm., Vol. COM-22, May 1974, pp., 624-635. The joint maximum likelihood sequence is determined as the sequence $\{\hat{a}_1(n), \hat{a}_2(n)\}_{n=1}^N$ that maximizes the metric:

$$\Lambda_N = \sum_{n=1}^N M(n) \quad (11)$$

where $M(n)$ are branch metrics, given by

$$M(n) = \text{Re} \left\{ \hat{a}_1^*(n) \left(2y_1(n) - \hat{a}_1(n) |g_1(n)|^2 - 2\hat{a}_2(n-1) s_{-1}^*(n) \right) \right\} \\ + \text{Re} \left\{ \hat{a}_2^*(n) \left(2y_2(n) - \hat{a}_2(n) |g_2(n)|^2 - 2\hat{a}_1(n) s_0(n) - 2\hat{a}_1(n-1) s_1(n) \right) \right\} \quad (12)$$

where $y_1(n) = g_1^*(n)r_n$, $y_2(n) = g_2^*(n)r'_n$ and $s_j(n) = g_1(n)g_2^*(n)\rho_{2,j}$. The state at time n

is given by $\beta_n = \{\hat{a}_1(n-1), \hat{a}_2(n-1)\}$. The metric in Equation (11) can be computed recursively, for example by using a trellis search algorithm with Viterbi pruning or a tree search algorithm with or without M-algorithm type pruning. Also, for MPSK and modulations in which all symbols have the same amplitude, the terms proportional to $|g_1(n)|^2$ and $|g_2(n)|^2$ may be omitted from Equation (12).

In order to describe adaptive channel estimation, Equations (2) and (9) can be combined as:

$$r_n = \underline{g}_n^H \Psi \hat{A}_n + \underline{w}_n$$

where $r_n = [r_n, r'_n]$, $\underline{w}_n = [w_n, w'_n]$, $\Psi = [\Phi, \Phi']$ and

$$\hat{A}_n = \begin{bmatrix} a_1(n) & a_2(n+1) & a_2(n) & a_2(n-1) & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & a_1(n+1) & a_1(n) & a_1(n-1) & a_2(n) \end{bmatrix}^T \quad (14)$$

Define the error corresponding to transitions $\beta_{n-1} \rightarrow \beta_n$ in the MLSE processor as

$$e(\beta_n | \beta_{n-1}) = r_{n-1} - \hat{\underline{g}}_{n-1}^H(\beta_{n-1}) \Psi \hat{A}_{n-1} \quad (15)$$

The medium response can then be updated using, for example, the LMS method as

$$\hat{\underline{g}}_n(\beta_n) = \hat{\underline{g}}_{n-1}(\beta_{n-1}) + \mu \Psi \hat{A}_{n-1} e^H(\beta_n | \beta_{n-1}) \quad (16)$$

The estimates obtained for time n , $\hat{\underline{g}}_n(\beta_n)$ can be used as approximate estimates for time $n+1$. Alternatively, the estimates for time $n+1$ can be obtained by extrapolating $\hat{\underline{g}}_n(\beta_n)$.

Joint medium response estimator 308 in the alternative embodiment estimates co-channel medium responses jointly using a generalized PSP algorithm based on the error as defined above. Joint sequence detector 602 in the alternative embodiment finds the sequence that maximizes the metric of Equation (11) recursively. Medium

5 response estimates needed to compute branch metrics in Equation (12) are provided
by adaptive channel estimator 604, which updates MIR coefficients recursively using
Equation (16), conditioned on the state of joint sequence detector 602. MIR
10 coefficients are initialized to the estimates obtained by joint medium response
5 estimator 308.

Two preferred embodiments of the present invention have been described for
the case of two non-dispersive co-channel signals. It will be understood by those
15 skilled in the art that the present invention may be used for more than two dispersive
co-channel signals. One skilled in the art will also appreciate that various
10 modifications can be made to fit particular needs. For example, signal timing can be
estimated in many alternative ways. When the receiver knows the training sequence
of the desired signal only or it is not feasible or reliable to employ the training
sequences of the interfering signals, their timing can be hypothesized and estimated
20 jointly along with the medium responses over the desired signal's training sequence.
15 Alternatively, in the case of a single non-dispersive and synchronized interfering
signal, the timing can be estimated by subtracting the desired signal component from
the data samples and identifying power peaks in the residual signal.

30 In the absence of *a priori* information on the interfering signal's co-channel
responses, the joint channel estimator can be initialized to zero corresponding to each
20 interfering signal. In this case, it is possible to constrain the first hypothesized symbol
for each interfering signal to an arbitrary choice. This is because the remaining
35 hypotheses can lead to channel estimates which are equally-likely phase-rotated
versions of the estimates corresponding to the choice and can thus be eliminated. In
the case of a single non-dispersive and synchronized interfering signal, the initial
25 channel response for the interfering signal can be found by subtracting the desired
signal component from the data signal. The amplitude of the interfering signal can be
40 initialized as the average amplitude of the residual signal while its phase can be
initialized as the phase of the first component of the residual signal. Joint channel
45 estimation can also be performed in a multi-pass fashion where the channel estimates
30 obtained in the first pass are used to initialize the estimator for the second pass and so
on.

50 In the case when pulse-shape side information is not available to the receiver
or signal timings can not be reliably estimated, it is possible to acquire and track the

5 joint overall channel responses rather than the medium responses. If the channels vary slowly over the burst, it may be desirable to freeze the medium or overall channel responses after acquisition and use them for demodulation without tracking.

10 Receivers can be modified to operate on fractionally-spaced samples obtained at the timing(s) of all (or the desired) co-channel signal(s). They can also be modified to operate on fractionally-spaced samples obtained at an arbitrary timing. In the case of multiple data samples per symbol, it is possible to use the Euclidean distance metric instead of the Ungerboeck metric of Equation (11) by ignoring noise correlation.

15 Symbol detection also includes generation of "soft" information, when needed for further processing, such as error correction decoding. It is well known how soft information may be extracted from an MLSE-based receiver using, for example, the SOVA algorithm or its derivatives.

20 While the invention has been described with regard to single antenna reception, it will be understood to one of ordinary skill that the invention can be used with reception on multiple antennas. With multiple receive antennas, there may be multiple receive signals, one corresponding to each antenna. Pre-combining of antenna signals also may be performed, such as beamforming, so that the multiple receive signals corresponding to multiple beam signals. The invention can be used with metric combining, as disclosed in U.S. Patent 5,191,598 to Backström et al. It can also be used with Interference Rejection Combining (IRC), as disclosed in U.S. Patent 5,680,419 to Bottomley, the disclosure of which is incorporated herein by reference in its entirety. With IRC, error values from multiple antennas are combined using an estimate of impairment correlation properties, also referred to as an impairment correlation estimate. With joint user demodulation, the impairment corresponds to noise plus interference with users not accounted for in channel estimation. With metric combining, a weighted sum of error-squared values is formed.

25 With multiple antennas, the present invention also can be used with an approach for canceling interference in channel estimation, as described in pending U.S. Application Serial Number 08/689,584 to Bottomley, the disclosure of which is incorporated herein by reference in its entirety. The error signals from multiple antennas are used together, with an impairment estimate, to estimate the channel

5 responses corresponding to the different antennas together. With the present invention, the channel response for each antenna can include the responses associated with multiple user signals

10 In the drawings and specification, there have been disclosed typical preferred
5 embodiments of the invention and, although specific terms are employed, they are used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention being set forth in the following claims.

Claims

5

10

15

20

25

30

35

40

45

50

55

What is Claimed is:

1. A receiver comprising:
means for estimating a plurality of timings for at least one received signal, the
plurality of timings corresponding to a plurality of transmitted signals;
means for sampling the at least one received signal in accordance with the
plurality of timings to produce a plurality of sample streams;
means for producing channel estimates for the plurality of transmitted signals;
means for computing metrics using the sample streams and the channel
estimates; and
means for detecting information symbols corresponding to the plurality of
transmitted signals, using the metrics.
2. A receiver according to Claim 1 wherein the means for estimating
comprises means for correlating the at least one received signal to at least one symbol
sequence.
3. A receiver according to Claim 1:
wherein the means for estimating comprises means for hypothesizing a timing;
and
wherein means for computing comprises means for computing metrics that are
associated with the hypothesized timing.
4. A receiver according to Claim 1 wherein the means for sampling
comprises means for obtaining a single sample per symbol period of the at least one
received signal in accordance with the plurality of timings to produce the plurality of
sample streams.
5. A receiver according to Claim 1 wherein the means for sampling
comprises means for obtaining a plurality of samples per symbol period of the at least
one received signal in accordance with the plurality of timings to produce the plurality
of sample streams.

5 6. A receiver according to Claim 1 wherein the means for producing
channel estimates comprises:
 means for generating pulse-shape information; and
10 means for producing channel estimates for the plurality of transmitted signals
5 using the at least one received signal and the pulse-shape information.

15 7. A receiver according to Claim 1 wherein the means for producing
channel estimates comprises means for producing channel estimates that are
associated with a plurality of symbol sequence hypotheses.

10 8. A receiver according to Claim 1 wherein the means for producing
channel estimates comprises means for updating channel estimates using an error
20 signal.

25 9. A receiver according to Claim 1 wherein the means for computing
metrics comprises:
 means for filtering the sample streams with the channel estimates to produce a
30 plurality of filter outputs; and
 means for computing metrics using the filter outputs.

20 10. A receiver according to Claim 1 wherein the means for computing
metrics comprises:
 means for estimating received values using the channel estimates and
35 hypothesized symbols; and
25 means for computing metrics using the estimated received values.

40 11. A receiver according to Claim 1 wherein the means for detecting
comprises:
45 means for storing path information that is associated with a plurality of paths;
30 means for extending the paths by hypothesizing symbol values and computing
metrics; and
50 means for discarding paths based on the metrics.

5 12. A receiver according to Claim 11 wherein the means for discarding paths comprises means for discarding paths based on the metrics and a state space.

10 13. A receiver according to Claim 1 wherein the means for computing metrics comprises:
5 means for estimating impairment correlation among receive antennas to produce an impairment correlation estimate; and
15 means for computing metrics using the sample streams, the channel estimates, and the impairment correlation estimate.

10 14. A receiver according to Claim 13 wherein the means for producing channel estimates comprises means for producing channel estimates using the impairment correlation estimate.

25 15. A receiver comprising:
means for generating pulse-shape information for at least one received signal;
means for producing channel estimates for a plurality of transmitted signals
30 using the at least one received signal and the pulse-shape information;
means for computing metrics using the at least one received signal and the
20 channel estimates; and
means for detecting information symbols corresponding to the plurality of
35 transmitted signals, using the metrics.

40 16. A receiver according to Claim 15 wherein the means for producing channel estimates comprises means for producing channel estimates that are associated with a plurality of symbol sequence hypotheses.

45 17. A receiver according to Claim 15 wherein the means for producing channel estimates comprises means for updating channel estimates using an error
30 signal.

50 18. A receiver according to Claim 15 wherein the means for computing metrics comprises:

5 means for filtering the at least one received signal with the channel estimates
to produce a plurality of filter outputs; and
means for computing metrics using the filter outputs.

10 19. A receiver according to Claim 15 wherein the means for computing
metrics comprises:

15 means for estimating received values using the channel estimates and
hypothesized symbols; and
means for computing metrics using the estimated received values.

10

20 20. A receiver according to Claim 15 wherein the means for detecting
comprises:

25 means for storing path information that is associated with a plurality of paths;
means for extending the paths by hypothesizing symbol values and computing
15 metrics; and
means for discarding paths based on the metrics.

30 21. A receiver according to Claim 20 wherein the means for discarding
paths comprises means for discarding paths based on the metrics and a state space.

20

35 22. A receiver according to Claim 15 wherein the means for computing
metrics comprises:

means for estimating impairment correlation among receive antennas to
produce an impairment correlation estimate; and

40 25 means for computing metrics using each received signal, the channel
estimates, and the impairment correlation estimate.

45 23. A receiver according to Claim 22 wherein the means for producing
channel estimates comprises means for producing channel estimates using each
30 received signal, the pulse-shape information, and the impairment correlation estimate.

50 24. A receiver comprising:

5 means for estimating a plurality of timings for at least one received signal, the plurality of timings corresponding to a plurality of transmitted signals;

10 means for sampling the at least one received signal in accordance with the plurality of timings to produce a plurality of sample streams;

5 means for initializing channel estimates for the plurality of transmitted channels and for initializing metrics;

15 means for computing updated metrics using the sample streams, the initialized channel estimates and the initialized metrics;

10 means for detecting information symbols corresponding to at least one of the transmitted signals, using the updated metrics; and

20 means for updating the channel estimates using the updated metrics.

25. A receiver according to Claim 24 wherein the means for estimating comprises means for correlating the at least one received signal to at least one symbol sequence.
15

26. A receiver according to Claim 24:

30 wherein the means for estimating comprises means for hypothesizing a timing; and

20 wherein the means for computing comprises means for computing updated metrics that are associated with the hypothesized timing.

27. A receiver according to Claim 24 wherein the means for sampling comprises means for obtaining a single sample per symbol period of the at least one received signal in accordance with the plurality of timings to produce a plurality of sample streams.
40

28. A receiver according to Claim 24 wherein the means for sampling comprises means for obtaining a plurality of samples per symbol period of the at least one received signal in accordance with the plurality of timings to produce a plurality of sample streams.
45
30

5 29. A receiver according to Claim 24 wherein the means for initializing
channel estimates comprises:

 means for generating pulse-shape information; and

10 means for initializing channel estimates using the pulse-shape information.

5 30. A receiver according to Claim 24 wherein the means for initializing
channel estimates comprises means for initializing channel estimates for a plurality of
15 symbol sequence hypotheses.

10 31. A receiver according to Claim 24 wherein the means for updating
channel estimates comprises means for updating channel estimates using an error
20 signal.

25 32. A receiver according to Claim 24 wherein the means for computing
15 metrics comprises:
 means for filtering the sample streams with the channel estimates to produce a
plurality of filter outputs; and
30 means for computing metrics using the filter outputs.

20 33. A receiver according to Claim 24 wherein the means for computing
updated metrics comprises:
35 means for estimating received values using the channel estimates,
hypothesized symbols and known symbol values; and
 means for computing metrics using the estimated received values.

25 34. A receiver according to Claim 24 wherein the means for detecting
comprises:
40 means for storing path information that is associated with a plurality of paths;
45 means for extending the paths by hypothesizing symbol values and computing
30 metrics; and
 means for discarding paths based on the metrics.

5 35. A receiver according to Claim 34 wherein the means for discarding paths comprises means for discarding paths based on the metrics and a state space.

10 36. A receiver according to Claim 24 wherein the means for initializing
5 comprises means for initializing channel estimates for a selected one of the plurality of channels using the received signal and known symbol values.

15 37. A receiver according to Claim 24 wherein the means for initializing
comprises means for initializing channel estimates for an interfering signal using the
10 received signal and channel estimates of a desired signal.

20 38. A receiver according to Claim 24 wherein the means for initializing
comprises means for initializing metrics for a predetermined symbol value for at least
one interfering symbol sequence.

25 39. A method of receiving at least one signal that corresponds to a plurality
15 of transmitted signals, comprising the steps of:

30 estimating a plurality of timings for the at least one received signal, the
plurality of timings corresponding to the plurality of transmitted signals;

20 sampling the at least one received signal in accordance with the plurality of
timings to produce a plurality of sample streams;

35 producing channel estimates for the plurality of transmitted signals;
computing metrics using the sample streams and the channel estimates; and
detecting information symbols corresponding to the plurality of transmitted
25 signals, using the metrics.

40 40. A method according to Claim 39 wherein the estimating step
comprises the step of correlating the at least one received signal to at least one symbol
45 sequence.

30 41. A method according to Claim 39:
wherein the step of estimating comprises the step of hypothesizing a timing;
50 and

5 wherein the step of computing comprises the step of computing metrics that
are associated with the hypothesized timing.

10 42. A method according to Claim 39 wherein the step of sampling
5 comprises the step of obtaining a single sample per symbol period of the at least one
received signal in accordance with the plurality of timings to produce the plurality of
15 sample streams.

20 43. A method according to Claim 39 wherein the step of sampling
10 comprises the step of obtaining a plurality of samples per symbol period of the at least
one received signal in accordance with the plurality of timings to produce the plurality
20 of sample streams.

25 44. A method according to Claim 39 wherein the step of producing
15 channel estimates comprises the steps of:
generating pulse-shape information; and
producing channel estimates for the plurality of transmitted signals using the
30 at least one received signal and the pulse-shape information.

20 45. A method according to Claim 39 wherein the step of producing
channel estimates comprises the step of producing channel estimates that are
35 associated with a plurality of symbol sequence hypotheses.

40 46. A method according to Claim 39 wherein the step of producing
25 channel estimates comprises the step of updating channel estimates using an error
signal.

45 47. A method according to Claim 39 wherein the step of computing
metrics comprises the steps of:
30 filtering the sample streams with the channel estimates to produce a plurality
of filter outputs; and
50 computing metrics using the filter outputs.

5 48. A method according to Claim 39 wherein the step of computing
metrics comprises the steps of:
 estimating received values using the channel estimates and hypothesized
10 symbols; and
5 computing metrics using the estimated received values.

15 49. A method according to Claim 39 wherein the step of detecting
comprises the steps of:
 storing path information that is associated with a plurality of paths;
10 extending the paths by hypothesizing symbol values and computing metrics;
20 and
 discarding paths based on the metrics.

25 50. A method according to Claim 49 wherein the step of discarding paths
15 comprises the step of discarding paths based on the metrics and a state space.

30 51. A method according to Claim 39 wherein the step of computing
metrics comprises the steps of:
 estimating impairment correlation among receive antennas to produce an
20 impairment correlation estimate; and
 computing metrics using the same streams, the channel estimates, and the
35 impairment correlation estimate.

40 52. A receiver according to Claim 51 wherein the step of producing
25 channel estimates uses the impairment correlation estimate.

45 53. A method of receiving at least one signal that corresponds to a plurality
of transmitted signals, comprising the steps of:
 generating pulse-shape information for the at least one received signal;
30 producing channel estimates for the plurality of transmitted signals using the
at least one received signal and the pulse-shape information;
 computing metrics using the at least one received signal and the channel
50 estimates; and

5 detecting information symbols corresponding to the plurality of transmitted
signals, using the metrics.

10 54. A method according to Claim 53 wherein the step of producing
5 channel estimates comprises the step of producing channel estimates that are
associated with a plurality of symbol sequence hypotheses.

15 55. A method according to Claim 53 wherein the step of producing
channel estimates comprises the step of updating channel estimates using an error
10 signal.

20 56. A method according to Claim 53 wherein the step of computing
metrics comprises the steps of:
filtering the at least one received signal with the channel estimates to produce
25 a plurality of filter outputs; and
15 computing metrics using the filter outputs.

30 57. A method according to Claim 53 wherein the step of computing
metrics comprises the steps of:
20 estimating received values using the channel estimates and hypothesized
symbols; and
35 computing metrics using the estimated received values.

40 58. A method according to Claim 53 wherein the step of detecting
25 comprises the steps of:
storing path information that is associated with a plurality of paths;
extending the paths by hypothesizing symbol values and computing metrics;
and
45 discarding paths based on the metrics.

30 59. A method according to Claim 58 wherein the step of discarding paths
comprises the step of discarding paths based on the metrics and a state space.
50

5 60. A method according to Claim 54 wherein the step of computing
metrics comprises the steps of:

10 estimating impairment correlation among receive antennas to produce an
impairment correlation estimate; and

5 computing metrics using each received signal, the channel estimates, and the
impairment correlation estimate.

15 61. A receiver according to Claim 60 wherein the step of producing
channel estimates uses each received signal, pulse-shape information, and the
10 impairment correlation estimate.

20 62. A method of receiving at least one signal that corresponds to a plurality
of transmitted signals, comprising the steps of:

25 estimating a plurality of timings for the at least one received signal, the
15 plurality of timings corresponding to the plurality of transmitted signals;

 sampling the at least one received signal in accordance with the plurality of
timings to produce a plurality of sample streams;

30 initializing channel estimates for the plurality of transmitted channels and
initializing metrics;

20 computing updated metrics using the sample streams, the initialized channel
estimates and the initialized metrics;

35 detecting information symbols corresponding to at least one of the transmitted
signals, using the updated metrics; and

 updating the channel estimates using the updated metrics.

40 63. A method according to Claim 62 wherein the step of estimating
comprises the step of correlating the at least one received signal to at least one symbol
sequence.

45 64. A method according to Claim 62:
30 wherein the step of estimating comprises the step of hypothesizing a timing;
and
50

5 wherein the step of computing comprises the step of computing updated
metrics that are associated with the hypothesized timing.

10 65. A method according to Claim 62 wherein the step of sampling
5 comprises the step of obtaining a single sample per symbol period of the at least one
received signal in accordance with the plurality of timings to produce a plurality of
sample streams.

15 66. A method according to Claim 62 wherein the step of sampling
10 comprises the step of obtaining a plurality of samples per symbol period of the at least
one received signal in accordance with the plurality of timings to produce a plurality
of sample streams.

20 67. A method according to Claim 62 wherein the step of initializing
25 channel estimates comprises the steps of:
generating pulse-shape information; and
initializing channel estimates using the pulse-shape information.

30 68. A method according to Claim 62 wherein the step of initializing
20 channel estimates comprises the step of initializing channel estimates for a plurality of
symbol sequence hypotheses.

35 69. A method according to Claim 62 wherein the step of updating channel
estimates comprises the step of updating channel estimates using an error signal.

40 70. A method according to Claim 62 wherein the step of computing
metrics comprises the steps of:
45 filtering the sample streams with the channel estimates to produce a plurality
of filter outputs; and
30 computing metrics using the filter outputs.

50 71. A method according to Claim 62 wherein the step of computing
updated metrics comprises the steps of:

5 estimating received values using the channel estimates, hypothesized symbols
and known symbol values; and
10 computing metrics using the estimated received values.

5 72. A method according to Claim 62 wherein the step of detecting
comprises:
15 storing path information that is associated with a plurality of paths;
extending the paths by hypothesizing symbol values and computing metrics;
and
10 discarding paths based on the metrics.

20 73. A method according to Claim 72 wherein the step of discarding paths
comprises the step of discarding paths based on the metrics and a state space.

25 74. A method according to Claim 62 wherein the step of initializing
comprises the step of initializing channel estimates for a selected one of the plurality
of channels using the at least one received signal and known symbol values.

30 75. A method according to Claim 62 wherein the step of initializing
20 comprises the step of initializing channel estimates for an interfering signal using the
at least one received signal and channel estimates of a desired signal.

35 76. A method according to Claim 62 wherein the step of initializing
comprises the step of initializing metrics for a predetermined symbol value for at least
40 one interfering symbol sequence.

45 77. A method according to Claim 62 wherein the steps of initializing
channel estimates, computing updated metrics, detecting information symbols and
updating the channel estimates are repeatedly performed to refine the channel
30 estimates.

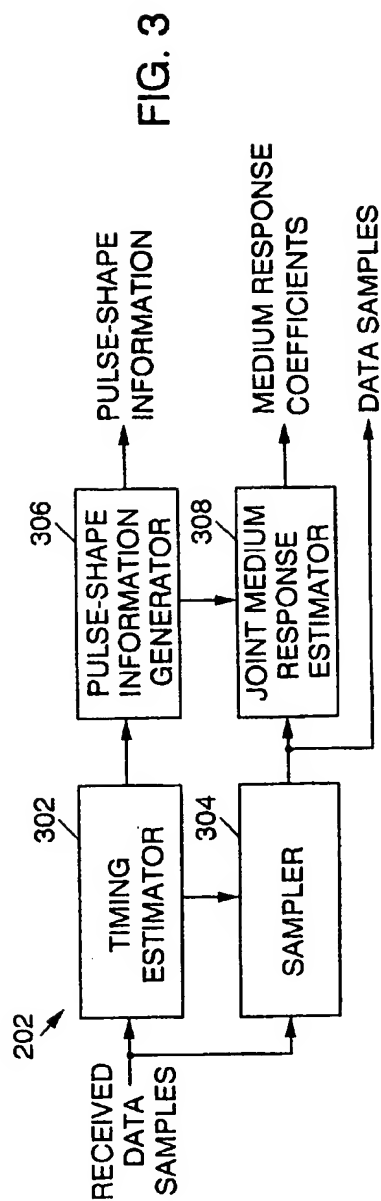
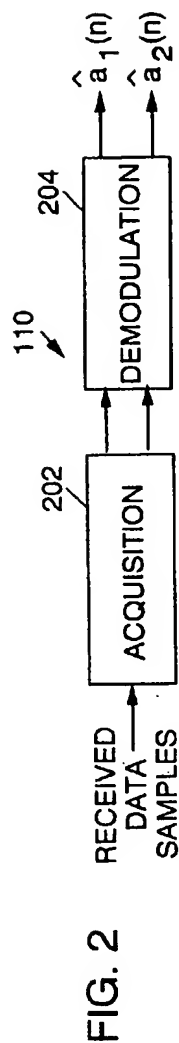
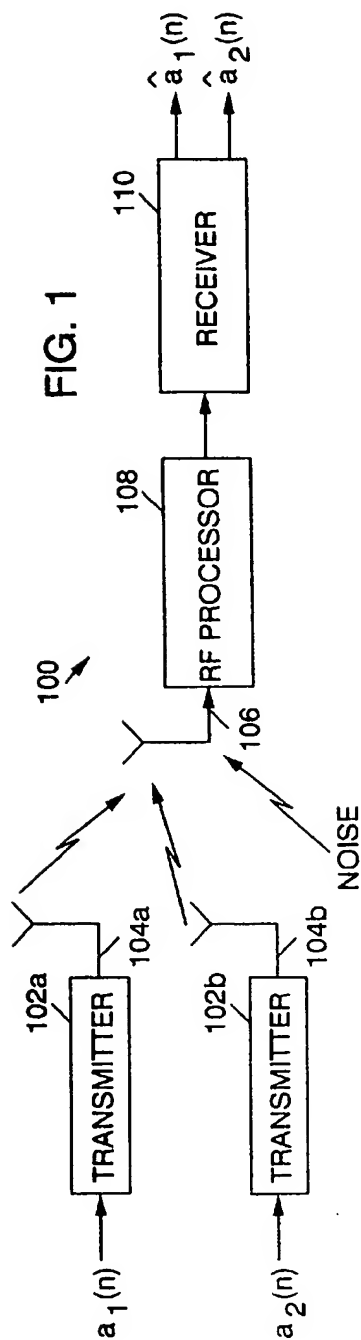


FIG. 4

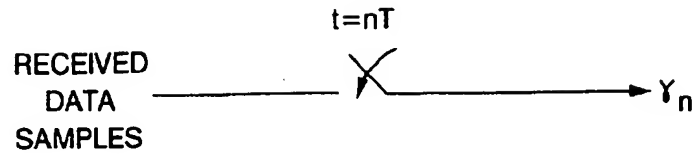


FIG. 5

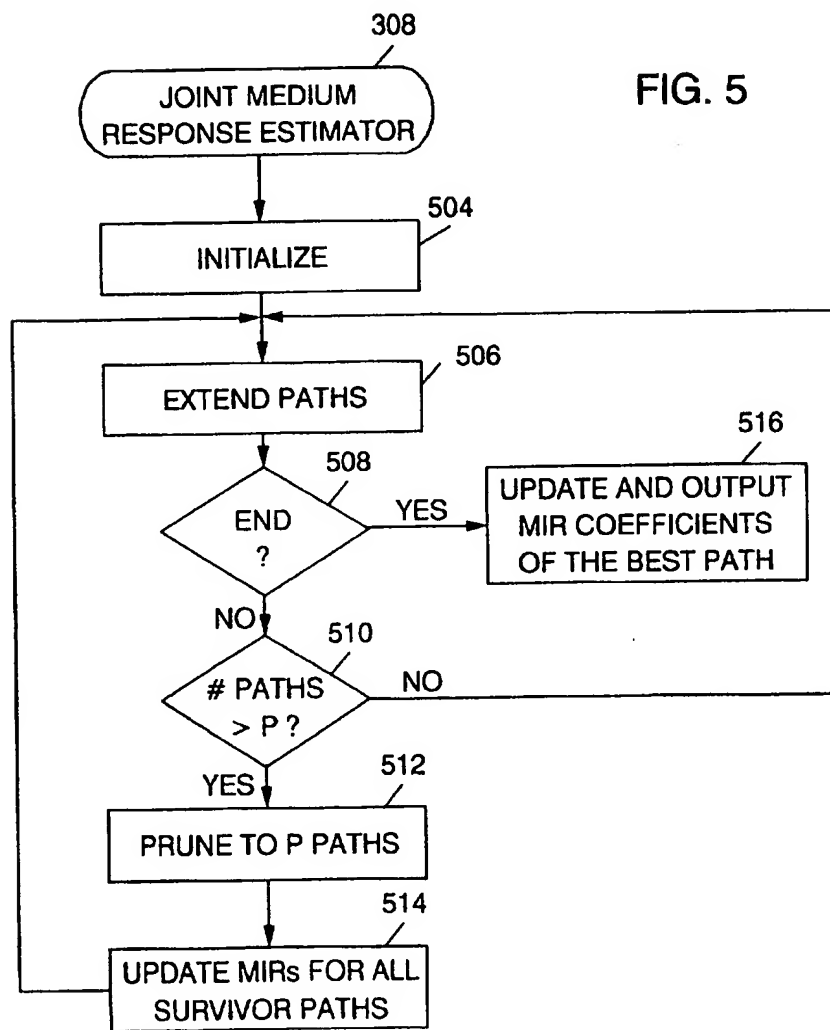


FIG. 6

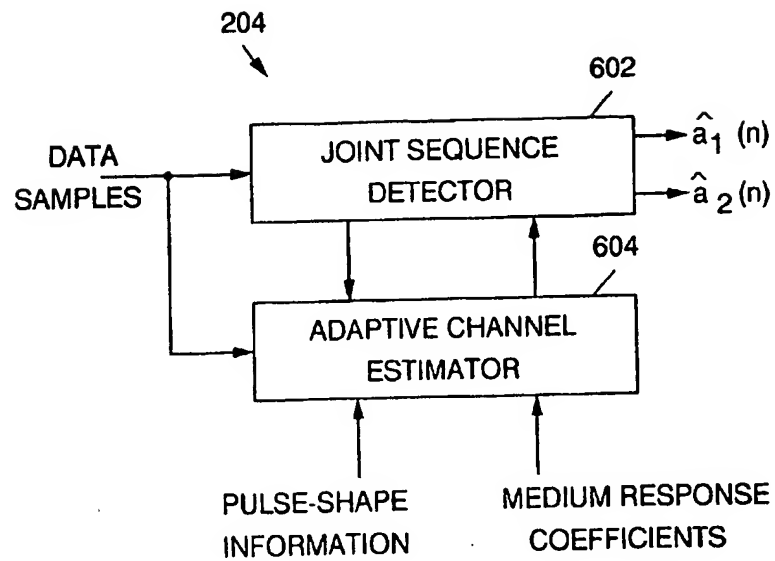


FIG. 7


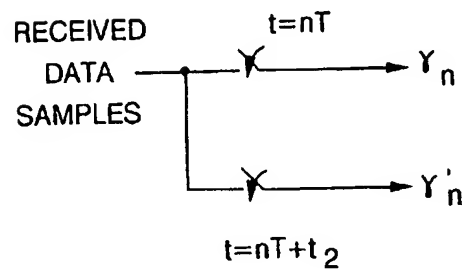


FIG. 8

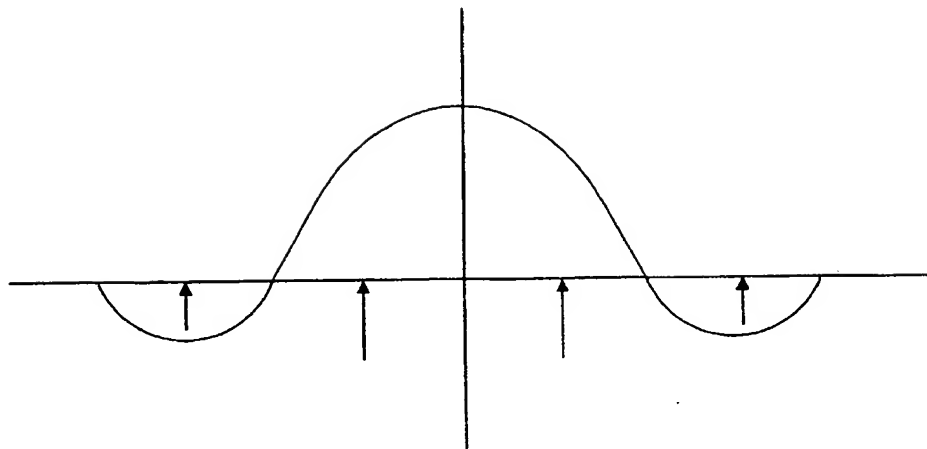

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 99/17808

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L25/03 H04L25/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	RANTA P A ET AL: "CO-CHANNEL INTERFERENCE CANCELLING RECEIVER FOR TDMA MOBILE SYSTEMS" PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON COMMUNICATIONS (ICC), US, NEW YORK, IEEE, pages 17-21, XP000532964 ISBN: 0-7803-2487-0 cited in the application sections III, IV --- -/--	1-77

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

Date of the actual completion of the international search

26 November 1999

Date of mailing of the international search report

07/12/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Ghigliotti, L

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/17808

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WALES S W: "TECHNIQUE FOR COCHANNEL INTERFERENCE SUPPRESSION IN TDMA MOBILE RADIO SYSTEMS" IEE PROCEEDINGS: COMMUNICATIONS, GB, INSTITUTION OF ELECTRICAL ENGINEERS, vol. 142, no. 2, pages 106-114, XP000517144 ISSN: 1350-2425 cited in the application section 4</p>	1-77
A	<p>GIRIDHAR K ET AL: "Nonlinear techniques for the joint estimation of cochannel signals" IEEE TRANSACTIONS ON COMMUNICATIONS, APRIL 1997, IEEE, USA, vol. 45, no. 4, pages 473-484, XP002124012 ISSN: 0090-6778 cited in the application page 474, left-hand column, line 4 - line 13 sections II, III</p>	1-77
A	<p>WO 98 26544 A (ERICSSON GE MOBILE INC) 18 June 1998 (1998-06-18) page 6, line 5 - line 10 page 7, line 12 - line 17 page 12, line 7 - line 22</p>	15-23
X,P	<p>HAFEEZ A. ET AL: "Co-channel interference cancellation for D-AMPS handsets" PROCEEDINGS OF THE 1999 IEEE 49TH VEHICULAR TECHNOLOGY CONFERENCE; HOUSTON, TX, USA, vol. 2, 16 - 20 May 1999, pages 1026-1031, XP002124013 1999 IEEE, Piscataway, NJ, USA the whole document</p>	1-77

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/17808

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9826544 A	18-06-1998	US 5889827 A	30-03-1999
		AU 7851698 A	03-07-1998
		EP 0944977 A	29-09-1999